


**Left Hand Opening Shown**  
**Right Hand Opposite**

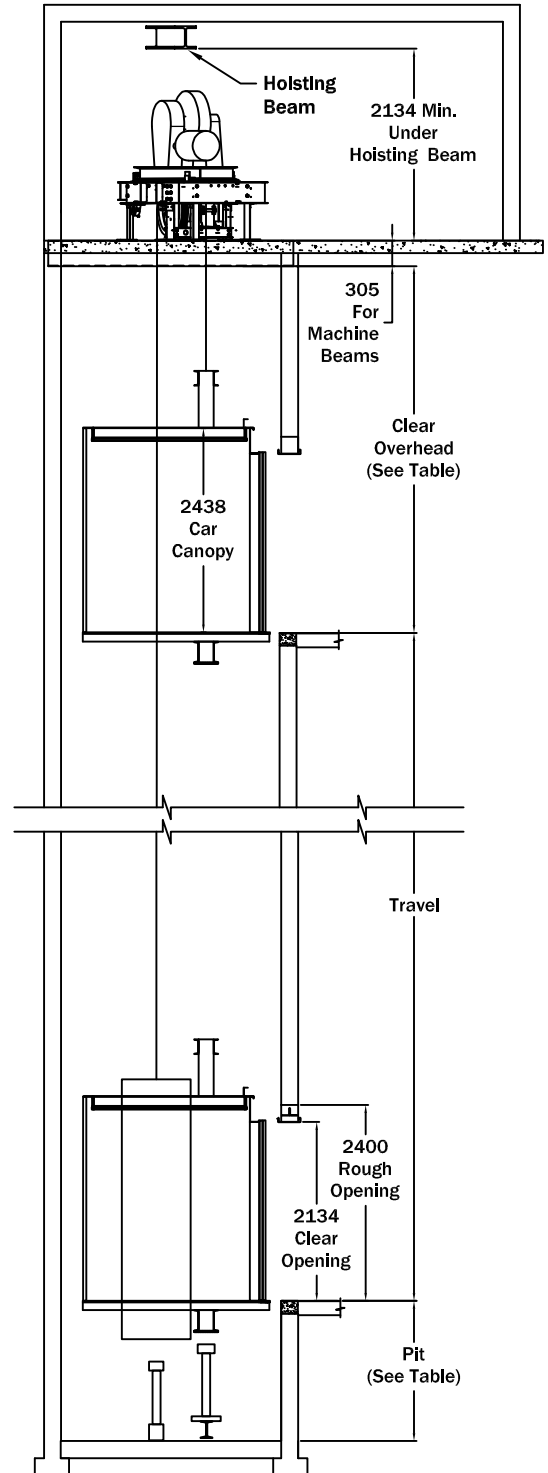

Speed \ Cap	Pit Depth		Overhead	
	950-1587 kg	1815-2275 kg	950-1587 kg	1815-2275 kg
0.75 - 1.0 m/s	1626 mm	1750 mm	4500 mm	4575 mm
>1.0-1.75 m/s	1676 mm	1750 mm	4675 mm	4750 mm

**Standard Available Sizes**

Capacity (kg)	W (mm)	D (mm)	D* (mm)	IW (mm)	ID (mm)	O (mm)	RO (mm)
950	2098	2302	-	1370	1726	914	1675
1200	2134	2608	-	1406	2032	1067	1675
1587	2338	2608	-	1610	2032	1067	1675
1815	2426	2940	-	1598	2364	1219	1860
2050	2426	3130	-	1598	2554	1219	1860
2275	2576	3130	-	1698	2554	1372	2010

- D\* = D + 102 mm at Rear Entrance Only
- For Seismic Zones 2 or Greater, Consult Delta Elevator for Increased Dimension "W"
- Clear Overhead Based Upon 2438mm Car Canopy
- Add 305mm to Clear Overhead for Every Car Canopy Increase of 152 to 305mm
- With Travel Greater than 10m, Consult Delta Elevator Regarding Design Options