




4100mm OVERHEAD - UP TO 6500mm TRAVEL  
4400mm OVERHEAD - 6501mm TO 7700mm TRAVEL

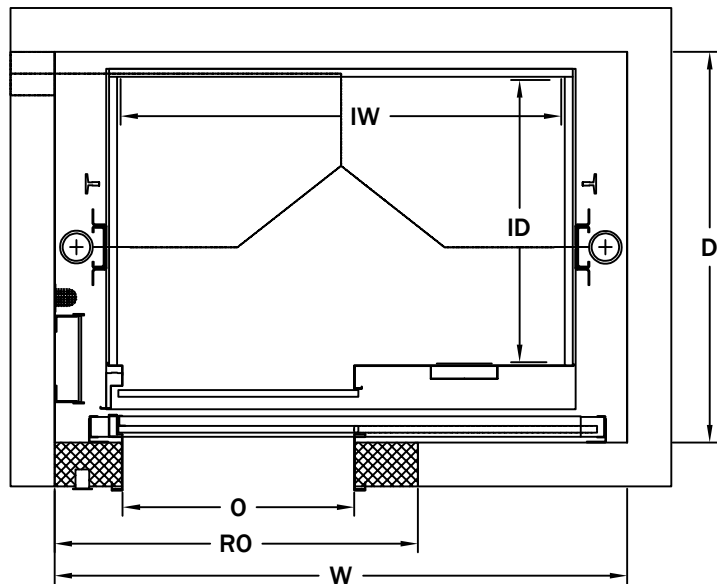

**Left Hand Opening Shown  
Right Hand Opposite**

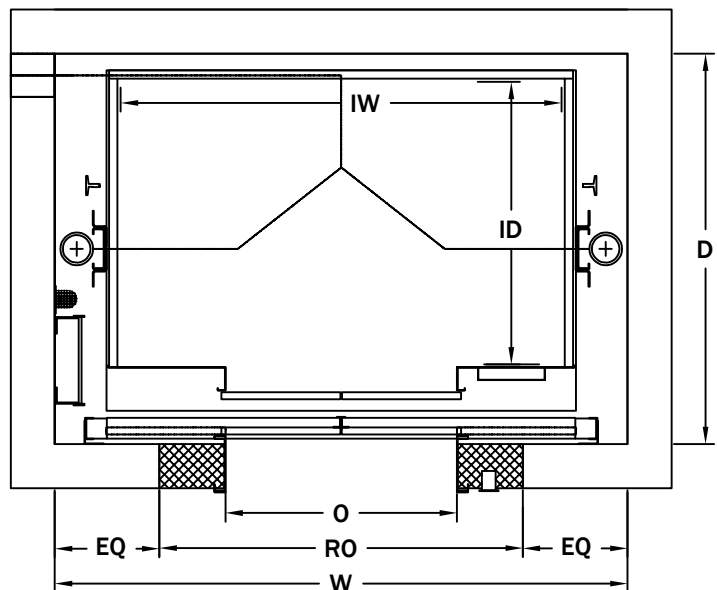

**Centre Opening**

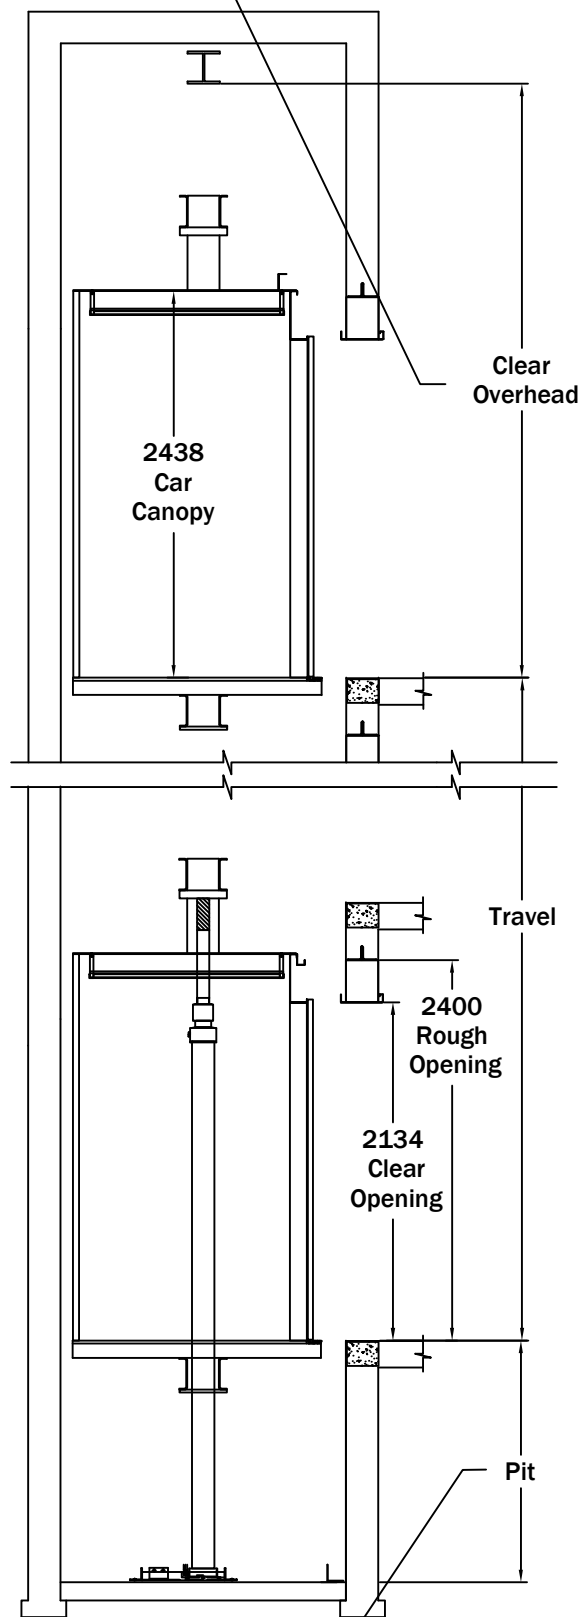

1525mm PIT - UP TO 6500mm TRAVEL  
1829mm PIT - 6501mm TO 7700mm TRAVEL

### Standard Available Sizes

| Capacity (kg) | W (mm) | D (mm) | D* (mm) | IW (mm) | ID (mm) | O (mm) | RO (mm) |
|---------------|--------|--------|---------|---------|---------|--------|---------|
| 910           | 2334   | 1800   | -       | 1726    | 1300    | 914    | 1675    |
| 1134          | 2640   | 1800   | -       | 2032    | 1300    | 1067   | 1675    |
| 1365          | 2640   | 1906   | -       | 2032    | 1406    | 1067   | 1675    |
| 1587          | 2674   | 2110   | -       | 2032    | 1610    | 1067   | 1675    |

- For Seismic Applications, Consult Delta Elevator for Increased Dimension "W"
- Clear Overhead Based Upon 2438mm Car Canopy
- For Car Canopy Height Increase Add Equal Height to Clear Overhead
- With Travel Greater than 7700mm, Consult Delta Elevator Regarding Design Options